



SIMPLE REINFORCED CONCRETE SLAB FOR 1 PADEL COURT

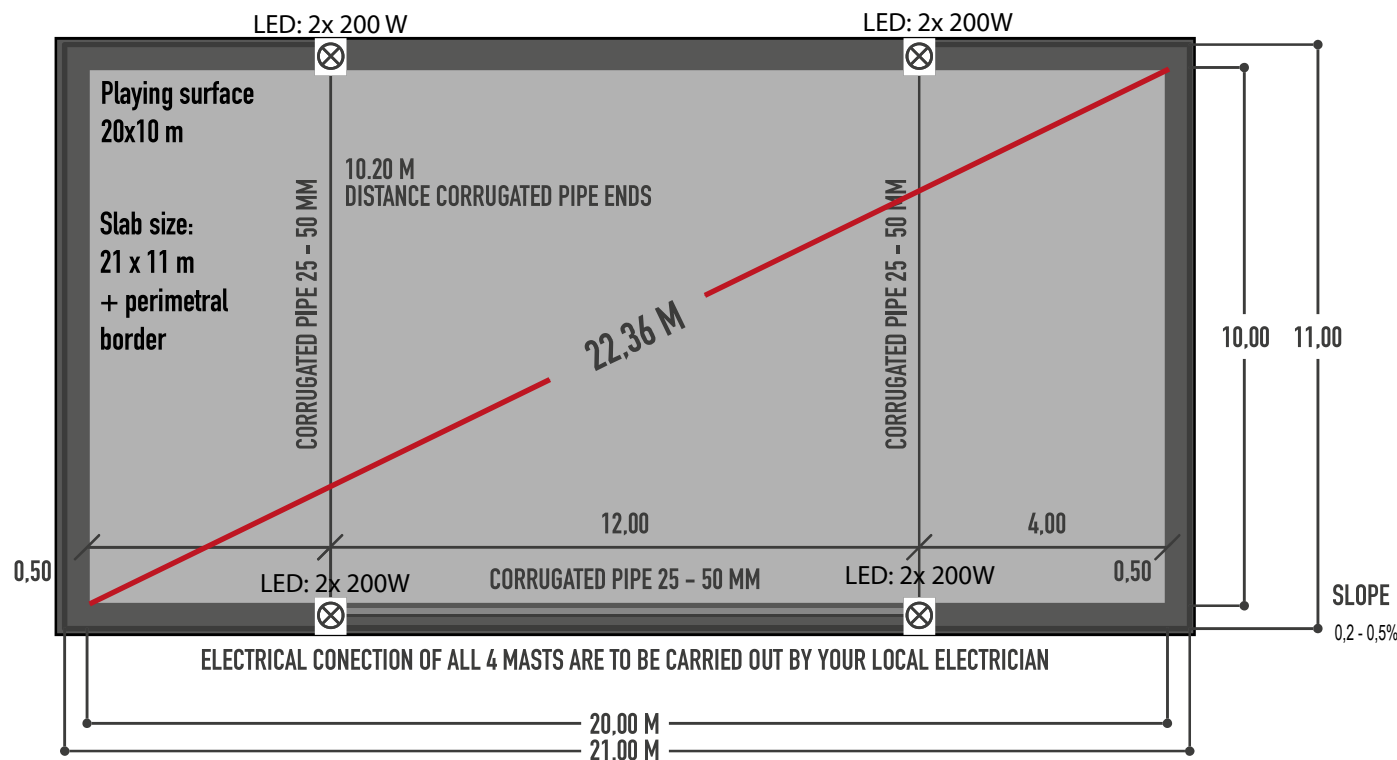

INSTALLATION AREA

IDEAL ORIENTATION: NOORTH / SOUTH

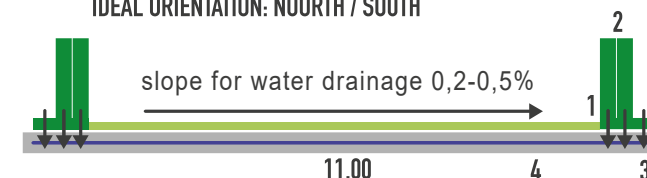

- 1 - ARTIFICIAL GRASS (TURF)
- 2 - STEEL STRUCTURE OF THE PADEL COURT
- 3 - EXPANDED SCREWS
- 4 - MASH 20 X 20 X 5 MM (BLUE LINE)


IMPORTANT NOTE FOR THE ELECTRICAL CONNECTION:

The cables must be already passed through the corrugated tubes before the installation. As per law the final electrical connection must be executed by a local electrician. If not specified differently the power supply is 8 LED-Spotlights x 200 W = 1.600 W = 1,6 kW total for 1 Padel Court.

The information is for your orientation, the final decision and responsibility is being taken by the building company or the local contractor based on local regulations.

Recommended cross-section for floor construction

IMPORTANT NOTE: CONSIDER AN EXPANSION GAP EVERY 30 M2

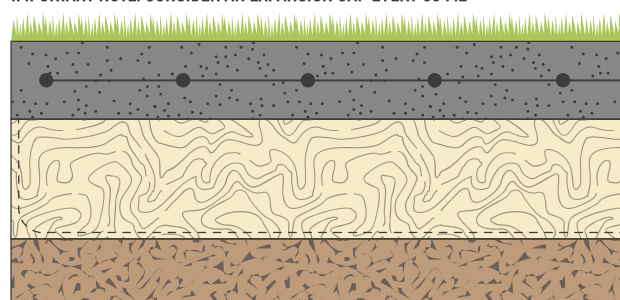

ARTIFICIAL GRASS (WILL BE INSTALLED BY US)

CONCRETE SLAB H-200 REINFORCED BY MESH 200 x 200 x 5 mm - AVERAGE THICKNESS: 12-15 CM

COMPACTED SUB-BASE (15-20 CM)

GEOTEXTILE MEMBRANE

COMPACTED SUBGRADE



Verdepadel, as a manufacturer of Padel Courts, nor Padelcreations.com is taking any responsibility for the proper design and execution of the foundations.